



# Skyline mini


## LED Floodlight

The Skyline Mini LED Floodlight offers a super slim compact design ideal for domestic and commercial premises. Available in a variety of wattages with the option to include a PIR.

- Genuine replacement for Halogen Floodlight
- Super slim compact design
- SMD LED
- Die-cast Aluminium
- Separately tested IP65 PIR Sensor (PIR versions)
- PIR Over-ride function (PIR versions)
- Average 8M detection range for PIR Floods
- 4000K



**LMR80:** Maximum 20% of lumen depreciation over rated hours.  
**B10:** Maximum 10% of fittings failure rate over rated hours

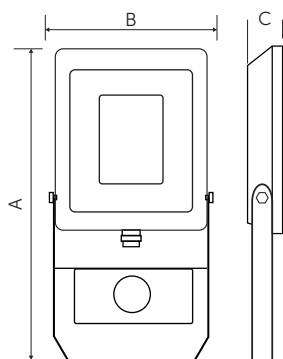

Without PIR

	10W	20W	30W	50W
A	100mm	114mm	135mm	172mm
B	91mm	112mm	142mm	183mm
C	28mm	28mm	28mm	28mm

With PIR

	10W	20W	30W	50W
A	127mm	137mm	162mm	194mm
B	91mm	112mm	142mm	183mm
C	54mm	54mm	54mm	54mm

# SkylineMini

## LED Floodlight

Technical Specification	
Construction	Die Cast Aluminium body, Stainless Steel screws and fixings
Driver	BELL
LED Chip	BELL
IP Rating	IP65
Operating Temp	-10°C to +25°C Outdoor use only
Input Voltage	240V
Power Factor	> 0.9
CRI	80 - Exceeds EU standard of Ra 70 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio
Windage	10W 0.009M <sup>2</sup> / 20W 0.013M <sup>2</sup> / 30W 0.019M <sup>2</sup> / 50W 0.031M <sup>2</sup> 10W PIR 0.012M <sup>2</sup> / 20W PIR /0.015XM <sup>2</sup> / 30W PIR 0.023M <sup>2</sup> / 50W PIR 0.036M <sup>2</sup>
Weight	10W 0.22Kg / 10W PIR 0.26Kg / 20W 0.27Kg / 20W PIR 0.31Kg / 30W 0.38Kg / 30W PIR 0.42Kg 50W 0.55Kg / 50W PIR 0.59Kg

Code	V	W	Description	Lm	Temp	Lm/W	Hours
10780	220-240	10	10W Skyline Mini LED Floodlight	1100	4000K	110	25000
10781	220-240	10	10W Skyline Mini LED PIR Floodlight	1100	4000K	110	25000
10782	220-240	20	20W Skyline Mini LED Floodlight	2200	4000K	110	25000
10783	220-240	20	20W Skyline Mini LED PIR Floodlight	2200	4000K	110	25000
10784	220-240	30	30W Skyline Mini LED Floodlight	3300	4000K	110	25000
10785	220-240	30	30W Skyline Mini LED PIR Floodlight	3300	4000K	110	25000
10786	220-240	50	50W Skyline Mini LED Floodlight	5500	4000K	110	25000
10787	220-240	50	50W Skyline Mini LED PIR Floodlight	5500	4000K	110	25000

<sup>1</sup> Exceeds EU standard of 70 for Lumens Maintenance Ratio

<sup>2</sup> Exceeds EU standard of RA 70 for Colour Rendering Index

<sup>3</sup> Subject to terms & conditions (Contact Customer Service)

